

产品描述

- 侧弯型, 6mm(宽)*12mm(高) 迷你尺寸
- 表面发光均匀柔和
- 端部硅胶一体压模成型, 无缝无暗区拼接
- IP67, 可长期暴露户外使用




产品型号编码规则

NFA0612 - */*/m - L* - * - * - 0


系列名	LED数量/功率/米	长度	色温	出线方式	室外
"NFA0612" = NEON FLEX Alpha 0612		18K 24K 27K 30K 40K 50K 65K 75K	R G B A Duo	"DW" = 双端出线 "SW" = 单端出线 "DC" = 双端连接器 "SC" = 单端连接器	




产品线图

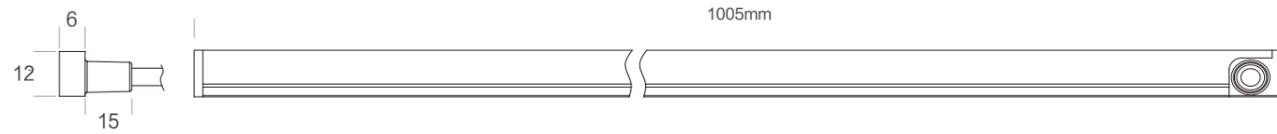

底出线



侧出线



直出线

产品参数

NEON FLEX Alpha 0612					
名称	功率	Lumen	Ra	CCT	剪切单元
NFA0612	10w/m	200lm/m[@3000K]	>90	1800K/2400K/2700K/3000K 4000K/5000K/6500K/7500K	50mm (6LED)
NFA0612 Duo		216lm/m[@2700K/6500K]		2700K/6500K	50mm (12LED)

通用参数

电压	24V
功率	--
使用环境	室外 (IP67)
使用温度范围	-20~45°C
调光方式	0-10V、DALI、DMX512(需外置解码器)等
最小弯曲半径	R=60mm
最大连接长度	5m
安装配件	① 不锈钢固定卡 NFA0612-SC ② 导轨 NFA0612-RF

注：不同色温的光通量计算方法：以 3000K 的光通量为基准值，2400K= 基准值 × 0.93；2700K= 基准值 × 0.97；4000K= 基准值 × 1.05；5000K= 基准值 × 1.08；6500K= 基准值 × 1.1




配件一览

(单位: mm)


① 不锈钢固定卡
NFA0612-SC

螺丝孔3.5mm




12

材质: SUS

② 导轨
NFA0612-RF

8

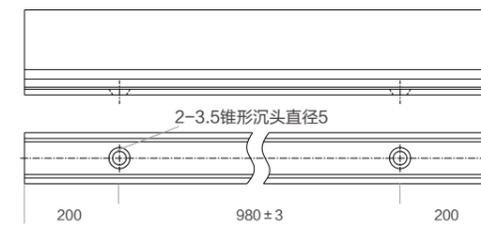

2-3.5锥形沉头直径5

200


980 ± 3

200


材质: 铝

安装方式 (单位: mm)

• 不锈钢固定卡安装方式

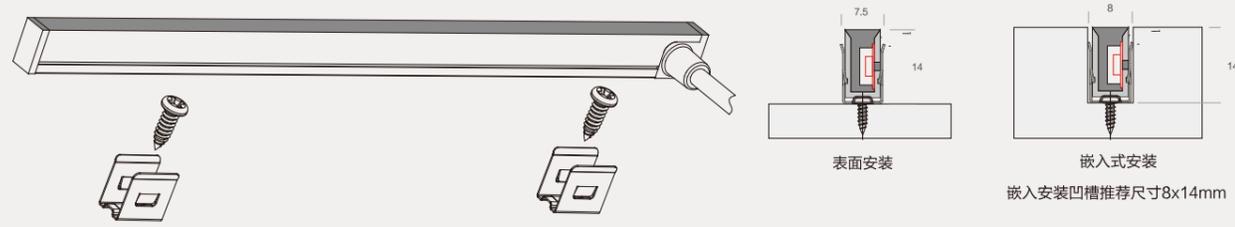


• 导轨安装方式

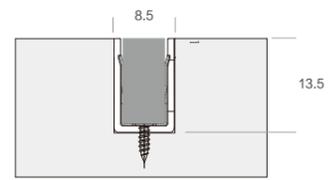


嵌入式安装凹槽推荐尺寸8.5x13.5mm



注意事项

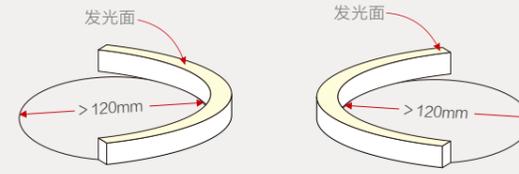


最小直径120mm

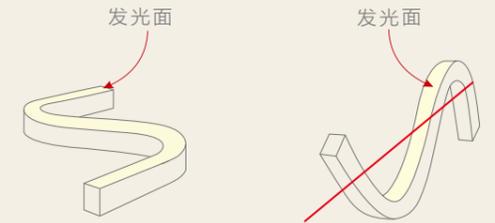

正确弯曲方向

错误弯曲方向

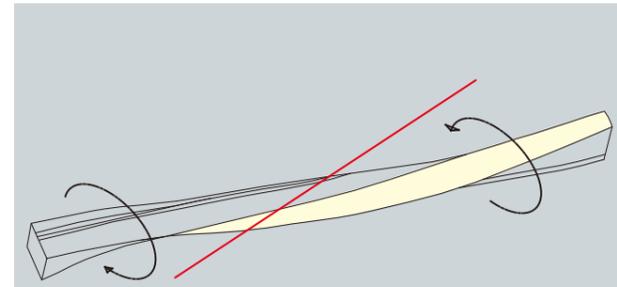

禁止扭曲